

Model Name

RM8602K







Unique selling point


- * Briliant UHD resolution image quality *Germ Resistant screen * Eye Care: Flicker-Free/Low Blue Light
- * Built-in annotation software Ezwrite 5.0
- * Cloud whiteboard has device broadcast and up to 30 device for co-operative writing. Web Cloud whiteboard support
- * Wireless mirror contents of Window/Mac/IOS/Android/Chrome to screen and mirror screen contents to mobile

devices at maximum of 16

- * Support 9 device mirroring simultaneously and IFP to IFP mirroring up to 32 set
- * Account management system (AMS) provides personalized workspace
- * Built in life time cloud base signage system X sign boardcast
- * Built in life time cloud based device management system DMS
- *AWS / Google classroom / Microsoft Azure / ENERGY STAR® certified


*AWS / Goog	le classroom / Microsoft Azure	/ ENERGY STAR® certified		
Panel	Screen Diagonal	86"		
	Backlight	DLED	DLED	
	Resolution	3840 × 2160		
	Aspect Ratio	16:9		
	Brightness	350nits		
	Contrast Ratio	1100:1		
	Viewing Angle	178 degree (H) / 178 degree (V)		
	Color gamut (x% NTSC)	72%		
	Frame Rate	60Hz		
	Response Time	8ms		
	Panel bit	10-bit	10-bit	
	Light life	50,000hrs		
	Orientation	Landscape		
Touch solution	Touch tech.	IR		
	Number of touches	Up to 20 Point Multi-touch		
	Touch interface	USB (type B) x 2		
	Touch accuracy	±Imm		
	Touch respond	8ms	8ms	
	Resolution	32767 × 32767		
	Thickness	Tempered, 4 mm		
	Hardness	9H		
	Germ resistant	Yes (TUV certified)		
	AG coating	75%		
Snoakou		16W x 2		
Interface Mechanical	Built-in speaker Input		x I	
		Power (AC) Inlet		
		Audio line-in	x I	
		D-sub + PC audio in	x I	
		HDMI	x 3 (2.0 x 3)	
		Type A (USB Playback)	x 5 (USB 2.0 x 2 + USB 3.0 x 3)	
		RS232	x I	
		SPDIF	x l	
		LAN	x I	
	Output	Microphone	No	
		HDMI	x I	
		Line out (3.5mm)	x I	
	Out.	NFC Reader/Writer	No	
	Others	IR receiver	x I	
	Dimension (WxHxD)	1957.1 x 1201.8 x 115.8mm / 2211 x 1355 x 280mm		
	(Without Packing / With Packing)	1737.1 X 1201.0 X 113.0111117 2211 X 1333 X 20011111		
	Net Weight/Gross Weight	70.2Kg / 94.6Kg		
Power	Power supply	AC100 to 240V, 50 / 60 Hz		
. 5	Power consumption	500W (max.)		
OSD		English / French / German / Dutch / Polish / Russian / Czech / Danish / Swedish / Italian / Romanian		
	On-Screen Display Languages	/ Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional Chinese / Simplified		
		Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korean / Turkish (26L)		
Accessories	Standard	Remote Control w/ Battery x I		
		Touch pen	x 2	
		Quick Start Guide	x I	
		Touch Cable (USB to USB)	x I	
		HDMI cable	x I	
		VGA(D-sub 15pin) Cable	x l	
		Wall mount	x I	

Input/output terminals





Wallmount

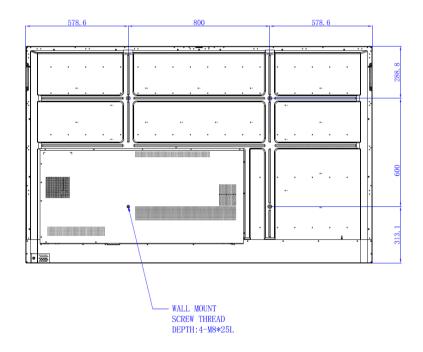

Dimension

