



Model Name


RP8601K

Unique selling point


- * Annotate and collaborate everywhere with the cloud whiteboard EZWrite 5.0
- * Facilitate a healthier learning environment through air-quality sensor
- * Account management system (AMS) provides personalized workspace
- * Anti-Glare/Low Blue Light/Flicker free/Germ-resistant Screen
- * Voice assistant provides hands free control over the IFP

Panel	Screen Size	86"
	Backlight / Lightsource	DLED
	Resolution (Pixels)	UHD 3840x2160 pixels
	Brightness (Typical)	400 nits
	Contrast Ratio (Typical)	1,200:1
	Viewing Angle (Horizontal/Vertical)	178°/178°
	Response Time (ms)	8ms
	Color Gamut (x% NTSC)	65%
	Panel Bit	10 bit
	Light Life (Typical)	30,000 hours
Touch	Touch Technology	IR Touch
	Numbers of Touch	Up to 20 Point Multi-touch
	Resolution (Points Area Function)	32,767*32,767
	Touch Interface	x2 (USB type B)
	OS Supported	Win 7, Win 8/8.1, Win 10 / Mac OS X10.11~10.12 /Chrome OS 58 / Ubuntu 16.04 / Fedora 28 / OpenSuse 15 / Android kernel version 3.10 or above
Glass	Tempered Glass	4mm, Tempered Glass
	Anti-Glare (AG) Coating	Yes
	Germ-Resistant Screen	Yes
Audio	Internal Speaker	16Wx2
	Internal Microphone	array mic x 4
	PC Audio	x1
	MIC (3.5mm)	x1
Others	Power Switch	x1
	VGA Input	x1
	HDMI Input	x3 (2.0)
	HDMI Output	x1
	Display Port	x1
	OPS Slot	x1
	USB Player (Photo, Video)	x6 (2.0x5, 3.0x1)
Control	RS232 Input	x1
	RJ45 Port	x1
	Firmware Update	USB/OTA
Mechanical	Weight (Without / With Packing) (kg)	85.5kg/98.0Kg
	Dimension (WxHxD) (mm)	2000.6 x 1241.6 x 141.9 mm
	Wall Mounting (VESA) (mm)	4 holes (700 x 400mm) Screw M8 x 25mm
	Handle	x2
	Pen Tray	x1
RF	NFC Reader / Writer	x1
OSD	On-Screen Display Languages	EN/FR/DE/NL/PL/RU/CZ/DN/SW/IT/RO/FI/NO/GR/HU/ES/PT/TC/SC /AB/JP/TH/PERS/VIE/KR (25 Languages)
Package / Accessory	Remote Controller	x1
	Power Cord (By Region)	x5 (1.8m), x2 (1.5m)
	VGA Cable	x 1 (1.5m)
	HDMI Cable	x 1 (1.5m)
	Quick Start Guide	x1
	USB Cable for Touch	x 1 (3m)
	Touch Pen (Stylus)	x2
	Software License Card	x1

Input/output terminals

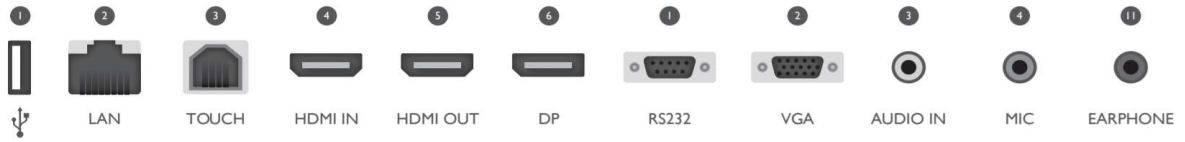

Wallmount

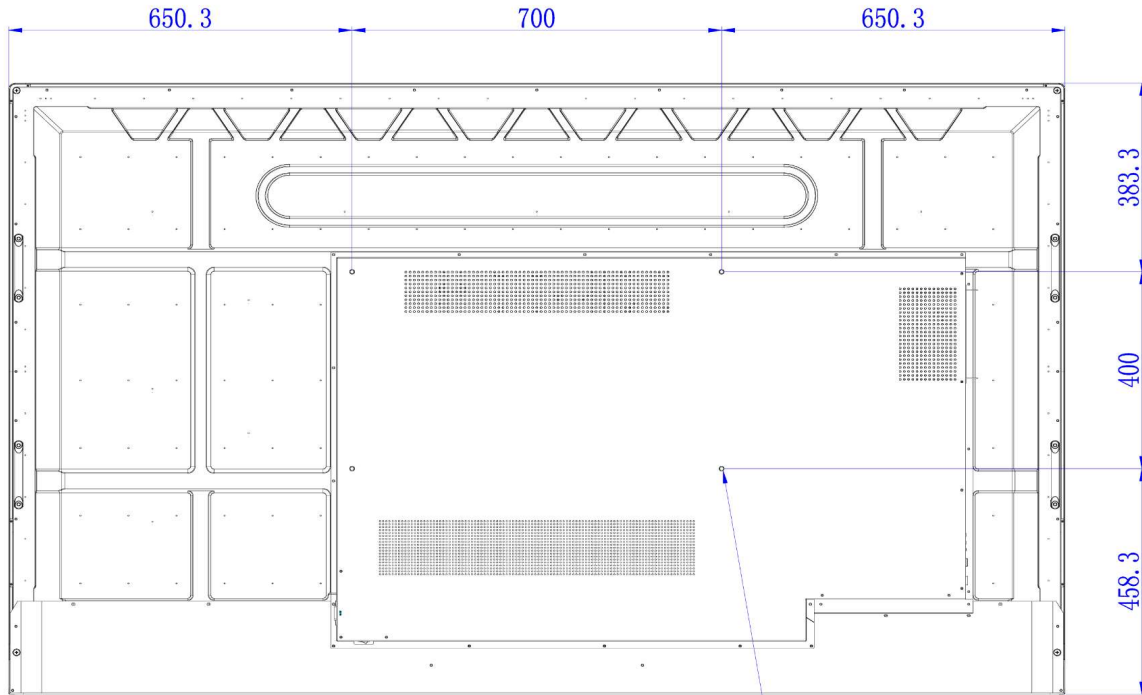

WALL MOUNT SCREW TYPE & THREAD DEPTH
: 4 - M8 * 25L (mm)

Dimensioni

