

NEW

COMB PUNCH AND BIND MACHINE

MODEL: TCC-2100



- ⊙ DIMENSIONS
- ⊙ NET WEIGHT
- ⊙ SHIPPING WEIGHT
- ⊙ PRODUCTION RATE

- ⊙ PUNCH CAPACITY
- ⊙ PUNCHING & BINDING LENGTH
- ⊙ DISENGAGEABLE PUNCH PINS
- ⊙ CONSTRUCTION
- ⊙ FEATURE

16.0" X 13.6" X 8.0" (40.6CM X 34.5CM X 20.3CM)

22.5 LBS (10.2 KGS)

26.2 LBS (11.9 KGS)

PUNCHING 5,000 SHEETS/HR
BINDING 250 BOOKS/HR

20 LB / 80GM 25 SHEETS/PUNCH
12" (30.5CM)


FROM 1 TO 21 HOLES

ALL METAL

4-POSITION PUNCHING DEPTH ADJUSTMENT
CONCEALED STORAGE SPACE IN FRONT COMPARTMENT
FOR KEEPING BINDING COMBS
WITH PUNCHING ALIGNMENT GUIDE AND OPEN THROAT ON
RIGHT END FOR MORE FLEXIBLE PUNCHING LENGTH CAPACITY

ELECTRIC COMB PUNCH AND BIND MACHINE

MODEL: TCC-2100E

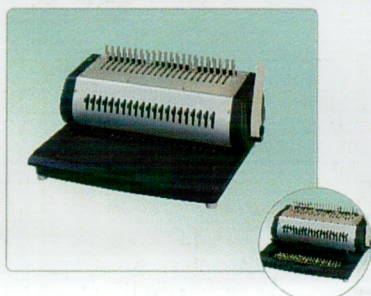

- ⊙ DIMENSIONS
- ⊙ NET WEIGHT
- ⊙ SHIPPING WEIGHT
- ⊙ PRODUCTION RATE

- ⊙ PUNCH CAPACITY
- ⊙ PUNCHING & BINDING LENGTH
- ⊙ DISENGAGEABLE PUNCH PINS
- ⊙ CONSTRUCTION
- ⊙ ELECTRIC
- ⊙ FEATURE

16.0" X 13.6" X 8.0" (40.6CM X 34.5CM X 20.3CM)

26.0 LBS (11.8 KGS)

28.6 LBS (13.0 KGS)

PUNCHING 10,000 SHEETS/HR
BINDING 250 BOOKS/HR

20 LB / 80GM 15 SHEETS/PUNCH

12" (30.5CM)

FROM 1 TO 21 HOLES

ALL METAL

110V 60HZ (OR 220V 50HZ)

4-POSITION PUNCHING DEPTH ADJUSTMENT
CONCEALED STORAGE SPACE IN FRONT COMPARTMENT
FOR KEEPING BINDING COMBS
WITH PUNCHING ALIGNMENT GUIDE AND OPEN THROAT ON
RIGHT END FOR MORE FLEXIBLE PUNCHING LENGTH CAPACITY

WIRE PUNCH AND BIND MACHINE

MODEL: TW-3100



- ⊙ DIMENSIONS
- ⊙ NET WEIGHT
- ⊙ SHIPPING WEIGHT
- ⊙ PRODUCTION RATE

- ⊙ PUNCH CAPACITY
- ⊙ BINDING CAPACITY
- ⊙ PUNCHING & BINDING LENGTH
- ⊙ DISENGAGEABLE PUNCH PINS
- ⊙ CONSTRUCTION
- ⊙ FEATURE

19.0" X 14.0" X 8.0" (48.3CM X 35.6CM X 20.3CM)

30.8 LBS (14.0 KGS)

34.3 LBS (15.4 KGS)

PUNCHING 5,000 SHEETS/HR
BINDING 250 BOOKS/HR

20 LB / 80GM 20 SHEETS/PUNCH

3/16" ~ 9/16" (4MM ~ 14MM) / 9/16" ~ 1 1/4" (14MM ~ 32MM)
14" (36CM)

FROM 1 TO 40 HOLES 3:1 / FROM 1 TO 27 HOLES 2:1


ALL METAL

4-POSITION PUNCHING DEPTH ADJUSTMENT
CONCEALED WIRE CLOSER IN FRONT COMPARTMENT
WITH PUNCHING ALIGNMENT GUIDE AND OPEN THROAT ON
RIGHT END FOR MORE FLEXIBLE PUNCHING LENGTH CAPACITY

ALSO AVAILABLE: TW-2100
2:1 WIRE PUNCH AND BIND MACHINE

COIL PUNCH AND BIND MACHINE

MODEL: TCC-SP41

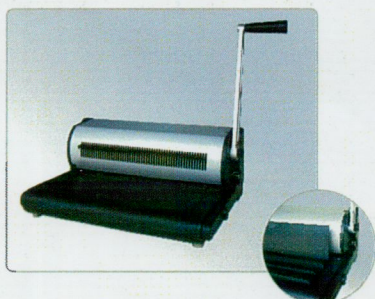

- ⊙ DIMENSIONS
- ⊙ NET WEIGHT
- ⊙ SHIPPING WEIGHT
- ⊙ PRODUCTION RATE

- ⊙ PUNCH CAPACITY
- ⊙ BINDING CAPACITY
- ⊙ PUNCHING & BINDING LENGTH
- ⊙ DISENGAGEABLE PUNCH PINS
- ⊙ CONSTRUCTION
- ⊙ FEATURE

19.0" X 14.0" X 8.0" (48.3CM X 35.6CM X 20.3CM)

27.0 LBS (12.3 KGS)

32.0 LBS (14.5 KGS)

PUNCHING 5,000 SHEETS/HR
BINDING 250 BOOKS/HR

20 LB/80 GM 20 SHEETS/PUNCH

3/16" ~ 1 3/4" (4MM ~ 45MM)

14" (36CM)

FROM 1 TO 53 HOLES

ALL METAL

4 POSITION PUNCHING DEPTH ADJUSTMENT
CONCEALED COIL CHANNELS IN FRONT COMPARTMENT.
ADJUSTABLE PUNCHING FOR A4, LEGAL, B5, LETTER
SIZE.
WITH PUNCHING ALIGNMENT GUIDE AND OPEN THROAT ON
RIGHT END FOR MORE FLEXIBLE PUNCHING LENGTH CAPACITY